


BR 05

Cast iron element for vertical (V) or lateral (L) fixing, supplied with M8 upper threaded hole and M12 lower threaded hole. Surface protection: sandblasting, one component zinc coat by immersion, two-component zinc phosphate primer coat, two bicomponent finishing standard gray paint (**S**) or with RAL colors on request.

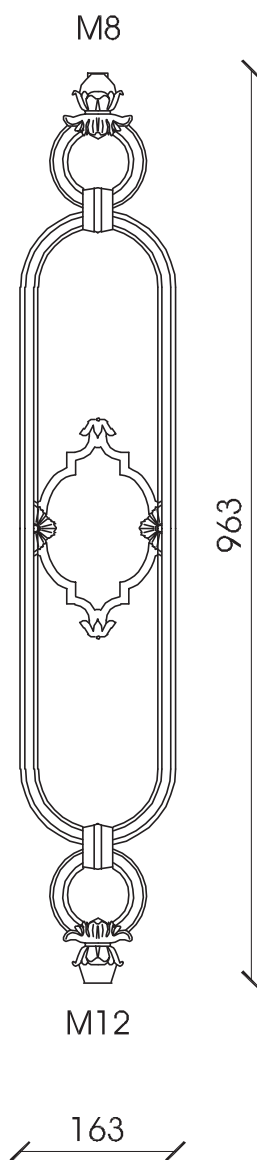

BR 05 VS


Vertical fixing element

MATERIAL

Cast iron casting GLJ-200 (UNI EN 1561)

WEIGHT

Kg. 5,7

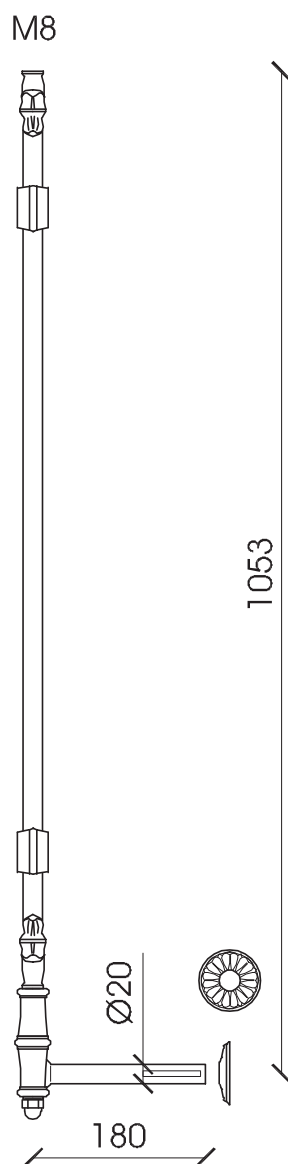

BR 05 LS

Lateral fixing element

MATERIAL


Cast iron casting GLJ-200 (UNI EN 1561)

Spheroidal cast iron lateral fixing (UNI EN 1561)
cast aluminium cover hole rosette


WEIGHT

Kg. 6,4


INSTALLATION EXAMPLES

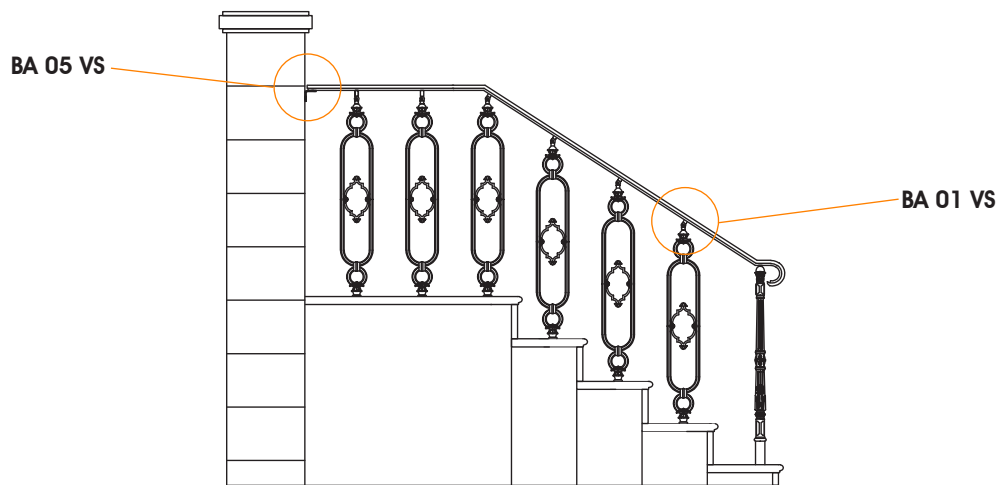

FLOOR VERTICAL FIXING **BR 05 V**

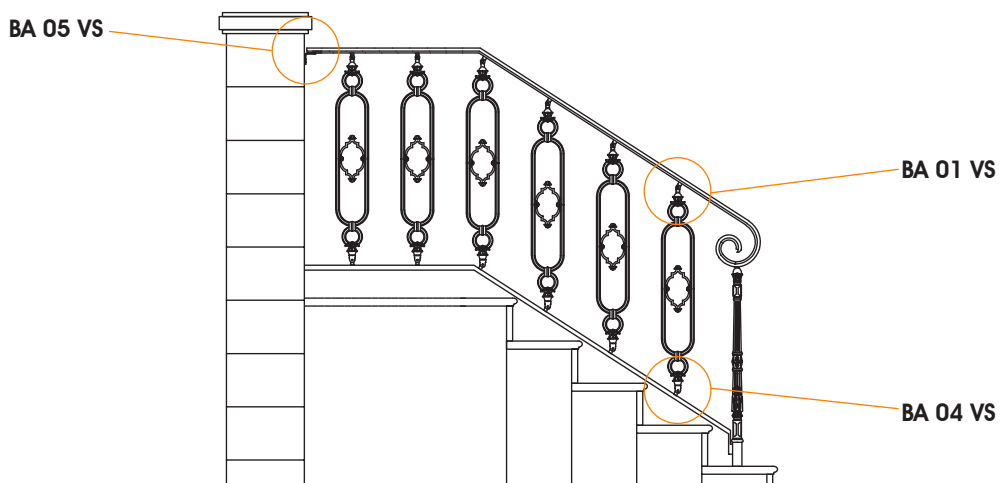

STEEL PROFILE VERTICAL FIXING **BR 05 V**

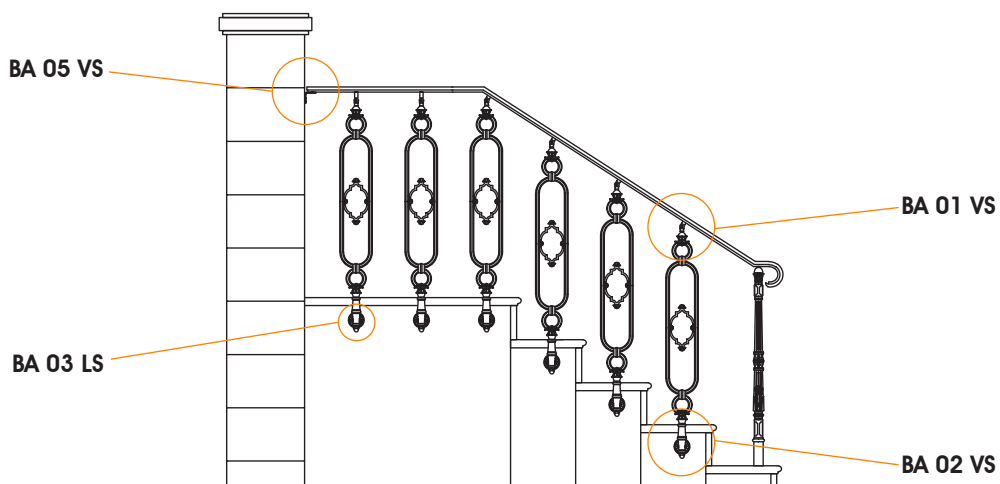

LATERAL FIXING **BR 05 L**

ACCESSORIES



BA 01 VS
UPPER FIXING



BA 04 VS
LOWER FIXING



BA 05 VS
WALL FIXING



BA 02 LS
LATERAL FIXING



BA 03 LS
COVER FOR HOLE
ROSETTE