
GHISARREDO
LIGHT AND DESIGN

SCALE 1:20

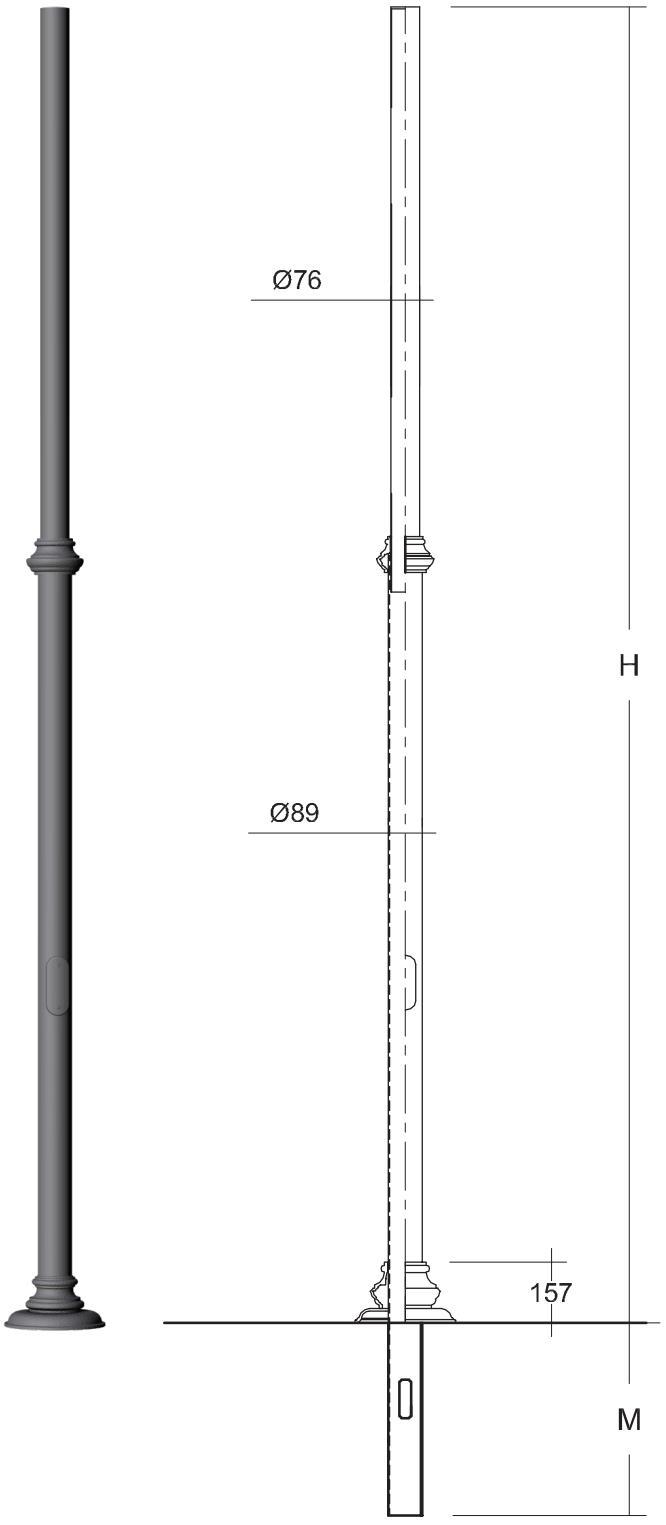

TAPERED POLE SERIES Ø89-76 mm

DESCRIPTION

STRUTTURA

S235JR steel pole (UNI-EN 10025) Ø89–76 mm, hot-dip galvanized (UNI-EN ISO 1461).

Cast iron flange cover GJL-200 (UNI-EN 1561)

Cast iron coupling GJL-200 (UNI-EN 1561) Ø114–89 mm.

Cast iron coupling GJL-200 (UNI-EN 1561) Ø89-76 mm.

Stainless steel fasteners.

For details on ground anchoring, refer to the technical drawing.

PAINTING PROCESS

STEEL
One coat of two-component zinc phosphate primer and two coats of two-component finish paint in standard gray (S). RAL colors available upon request.

ALUMINUM
One coat of two-component zinc phosphate primer and two coats of two-component finish paint in standard gray (S). RAL colors available upon request.

CAST IRON
Sandblasting, one dip coat of single-component zinc coating, one coat of two-component zinc phosphate primer, two finish coats of standard gray (S), two-component paint. RAL colors available upon request.

MODEL	HEIGHT - H	MASONRY - M
LPR 021	3400 mm	500 mm
LPR 022	3900 mm	500 mm
LPR 023	4400 mm	600 mm

Ghisarredo reserves the right to make changes to its products and documentation without prior notice.